

LED Flood Light

Flood Light

Product Description


VaOpto's LED Flood Light is an energy-efficient, lead-free, UV-free, and long-lasting cold lighting source. In comparison to standard high-pressure sodium flood lights, VaOpto's LED Flood Lights reduce energy consumption by 70%-80% and require fewer lamp replacements.

Product Information

- Cool White: CRI > 80
- Neutral White: CRI > 80
- Warm White: CRI > 80
- Uses ultra-bright LEDs
- Viewing angle: 60°

Ordering Information


Part Number	Dimensions(in)	Power (W)	Lumens (LM)	CCT
VO-FD-20CW1-60A-120N	12.6*11.02*10.63	24	1600	6500K
VO-FD-20NW1-60A-120N	12.6*11.02*10.63	24	1500	4100K
VO-FD-20WW1-60A-120N	12.6*11.02*10.63	24	1400	3500K



Part Number	Dimensions(in)	Power (W)	Lumens (LM)	CCT
VO-FD-CW-N42	10.63*11.81*6.52	42	3780	6500K
VO-FD-NW-N42	10.63*11.81*6.52	42	3570	4100K
VO-FD-WW-N42	10.63*11.81*6.52	42	3150	3500K
VO-FD-CW-N56	11.81*11.81*6.52	56	5040	6500K
VO-FD-NW-N56	11.81*11.81*6.52	56	4760	4100K
VO-FD-WW-N56	11.81*11.81*6.52	56	4200	3500K
VO-FD-CW-N70	13.03*11.81*6.52	70	6300	6500K
VO-FD-NW-N70	13.03*11.81*6.52	70	5950	4100K
VO-FD-WW-N70	13.03*11.81*6.52	70	5250	3500K
VO-FD-CW-N84	14.9*11.81*6.52	84	7560	6500K
VO-FD-NW-N84	14.9*11.81*6.52	84	7140	4100K
VO-FD-WW-N84	14.9*11.81*6.52	84	6720	3500K
VO-FD-CW-N98	16.75*11.81*6.52	98	8820	6500K
VO-FD-NW-N98	16.75*11.81*6.52	98	8330	4100K
VO-FD-WW-N98	16.75*11.81*6.52	98	7840	3500K



*42-LED count model shown

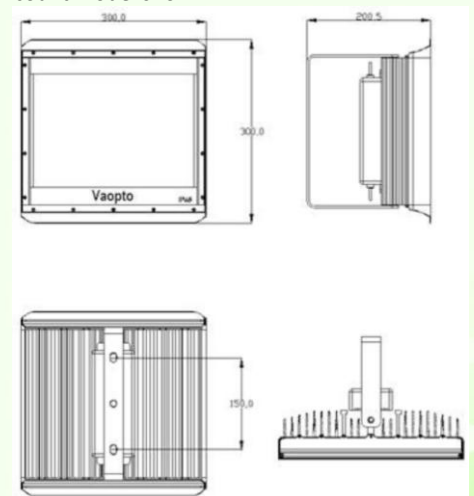

Energy Star Performance

- Lamps designed to produce at least 70% of initial light output after 50,000 hours

Power

- Input Voltage: 100-240V AC

Certifications

- cULus Listed File # E335469 Pending

Installation

For installation information please refer to the installation guide found on our website, www.vaopto.com.



VaOpto
LED Manufacturer

VAOPTO
5178 W. Patrick Lane
Las Vegas, NV 89118, U.S.A.
P: 702-517-5789 F: 702-979-3582
info@vaopto.com
www.vaopto.com