

LED T8 Tube Light

Product Description

VAOPTO's DLC rated LED T8 with internal driver, the high Luminaire Efficacy Four-foot Linear Replacement Lamps, is an energy-efficient, lead-free, UV-free, and long-lasting cold lighting source. In comparison to florescent T8 tube lights, VAOPTO's LED T8 Tube Light Series reduces energy consumption by 50%-75%.

Product Features

Power Input: 100-277VAC, 50/60Hz

CRI > 80


Beam Angle: 120/300

PF > 90

Operation Temp: 0F - 120F

For dry and damp locations

5-year limited warranty

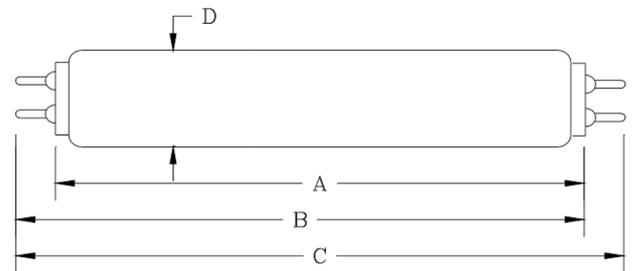

Nominal Length	A	B	C	D
48 in	47.22 in	47.50 in	47.78 in	Φ1 in
24 in	23.61 in	23.75 in	23.89 in	Φ1 in

Order Information

Part Number Example: VO-T8-14WWF4-AB

Company Name	Product	CCT	Lamp Power	Lens Type	Length*	Shape	Type	Lens
VO VaOpto	T8 LED T8 Tube	XW	12	F	2	(N/A)	A	(N/A)
		2700K	12 Watt	Frosted	2 feet	Straight	Type A	Plastic&Glass
		WW	14	C	4	U	B	P
		3000K	14 Watt	Clear	4 feet	U-shape	Type B	Plastic
		XWW	15				AB	G
		3500K	15 Watt				Type A&B	Glass
		NW	18				C	
		4000K	18 Watt				Type C	
		XDW						
		4500K						
		DW						
		5000K						
		XCW						
		5700K						
		CW						
6500								

*Length is available from 1' to 8'

Certifications



LED T8 Tube Light

Product Number & Lighting Data

Part Number	Input Voltage(V)	Output Power(w)	Light Output(lm)	CCT(K)	Efficiency(lm/w)	DLC
VO-T8-XWW-15F2U-C	100 - 277	15	1882	3000	130	Y
VO-T8-WW-15F2U-C	100 - 277	15	1950	3500	130	Y
VO-T8-NW-15F2U-C	100 - 277	15	1950	4000	130	Y
VO-T8-DW-15F2U-C	100 - 277	15	1950	5000	130	Y
VO-T8-XWW-15F2U-AB	100 - 277	15	1970	3000	130	Y
VO-T8-WW-15F2U-AB	100 - 277	15	1950	3500	130	Y
VO-T8-NW-15F2U-AB	100 - 277	15	1950	4000	130	Y
VO-T8-DW-15F2U-AB	100 - 277	15	1950	5000	130	Y
VO-T8-WW-18F4-DP	100 - 277	18	1720	3000	104	Y
VO-T8-WW-18F4-D	100 - 277	18	1840	3000	110	Y
VO-T8-NW-18F4-DP	100 - 277	18	1750	4000	103	Y
VO-T8-NW-18F4-D	100 - 277	18	2070	4000	121	Y
VO-T8-DW-18F4-DP	100 - 277	18	1850	5000	110	Y
VO-T8-DW-18F4-D	100 - 277	18	2250	5000	131	Y
VO-T8-WW-20F4-C	100 - 277	20	2260	3000	110	Y
VO-T8-NW-20F4-C	100 - 277	20	2430	4000	112	Y
VO-T8-DW-20F4-C	100 - 277	20	2490	5000	113	Y
VO-T8-WW-18F4-C	100 - 277	18	2230	3000	107	Y
VO-T8-DW-18F4-C	100 - 277	18	2210	5000	106	Y
VO-T8-NW-18F4-C	100 - 277	18	2260	4000	106	Y
VO-T8-WW-15F4-C	100 - 277	15	1930	3000	109	Y
VO-T8-NW-15F4-C	100 - 277	15	1930	4000	109	Y
VO-T8-DW-15F4-C	100 - 277	15	1930	5000	109	Y
VO-T8-WW-22F4SS	100 - 277	22	2670	3000	124	Y
VO-T8-XWW-22F4SS	100 - 277	22	2690	3500	124	Y
VO-T8-NW-22F4SS	100 - 277	22	2690	4000	124	Y
VO-T8-XNW-22F4SS	100 - 277	22	2690	4500	124	Y
VO-T8-DW-22F4SS	100 - 277	22	2690	5000	124	Y
VO-T8-WW-15F4SS	100 - 277	15	1840	3000	125	Y
VO-T8-XWW-15F4SS	100 - 277	15	1840	3500	128	Y
VO-T8-NW-15F4SS	100 - 277	15	1840	4000	128	Y
VO-T8-XNW-15F4SS	100 - 277	15	1840	4500	128	Y
VO-T8-DW-15F4SS	100 - 277	15	1840	5000	128	Y
VO-T8-NW-277C4-B	100 - 277	20	2390	4000	116	Y
VO-T8-NW-277F4-B	100 - 277	20	2220	4000	110	Y
VO-T8-DW-277C4-B	100 - 277	20	2410	5000	122	Y
VO-T8-DW-277F4-B	100 - 277	20	2240	5000	113	Y
VO-T8-NW-277F4	100 - 277	18	1730	4000	116	Y
VO-T8-NW-277C4	100 - 277	18	1750	4000	108	Y
VO-T8-DW-277F4	100 - 277	18	1760	5000	119	Y
VO-T8-DW-277C4	100 - 277	18	1760	5000	113	Y
VO-T8-NW-277C4-E	100 - 277	16	1880	4000	110	Y
VO-T8-NW-277F4-E	100 - 277	16	1750	4000	127	Y
VO-T8-DW-277C4-E	100 - 277	16	1940	5000	115	Y
VO-T8-DW-277F4-E	100 - 277	16	1860	5000	122	Y
VO-T8-NW-277F4-A	100 - 277	14	2030	4000	120	Y
VO-T8-NW-277C4-A	100 - 277	14	2280	4000	122	Y
VO-T8-DW-277F4-A	100 - 277	14	2050	5000	122	Y
VO-T8-DW-277C4-A	100 - 277	14	2180	5000	125	Y

More details on www.designlights.org