

VaOpto

LED Manufacturer

LED T8 Tube Light and LED Fixtures



Product Guide



E324837
E362951
E335469



LED Tube Light



G13



Single Pin



RD17



Mini Bi Pin



Ballast and AC Compatible LED T8 Tube

Model Number	Wattage (W)	Voltage (V AC)	Lumen (LM)	Efficacy (LM/W)	CCT (K)	CRI	Lens	Driver	Dimmable	Length (ft)	Power Input
VO-T8-WW-15F4-C	18	100-277	1,929	109	3000	> 80	Frosted	Internal	No	4	One or Two End
VO-T8-NW-15F4-C	18	100-277	1,929	109	4000	> 80	Frosted	Internal	No	4	One or Two End
VO-T8-DW-15F4-C	18	100-277	1,929	109	5000	> 80	Frosted	Internal	No	4	One or Two End
VO-T8-WW-18F4-C	21	100-277	2,231	106	3000	> 80	Frosted	Internal	No	4	One or Two End
VO-T8-NW-18F4-C	21	100-277	2,261	105	4000	> 80	Frosted	Internal	No	4	One or Two End
VO-T8-DW-18F4-C	21	100-277	2,212	105	5000	> 80	Frosted	Internal	No	4	One or Two End
VO-T8-WW-20F4-C	22	100-277	2,255	100	3000	> 80	Frosted	Internal	No	4	One or Two End
VO-T8-NW-20F4-C	22	100-277	2,431	112	4000	> 80	Frosted	Internal	No	4	One or Two End
VO-T8-DW-20F4-C	22	100-277	2,489	113	5000	> 80	Frosted	Internal	No	4	One or Two End



E324837 (Type A and Type B)

Traditional LED T8 Tube Light - Single End Power

Model Number	Wattage (W)	Voltage (V AC)	Lumen (LM)	Efficacy (LM/W)	CCT (K)	CRI	Lens	Driver	Dimmable	Length (ft)	Power Input
VO-T8-DW-277C4	14	110-277	1762	125	5000	> 80	Clear	Internal	No	4	One End
VO-T8-NW-277C4	14	110-277	1746	122	4000	> 80	Clear	Internal	No	4	One End
VO-T8-DW-277F4	14	110-277	1757	122	5000	> 80	Frosted	Internal	No	4	One End
VO-T8-NW-277F4	14	110-277	1726	120	4000	> 80	Frosted	Internal	No	4	One End
VO-T8-DW-277C4-E	16	110-277	1936	119	5000	> 80	Clear	Internal	No	4	One End
VO-T8-NW-277C4-E	16	110-277	1883	116	4000	> 80	Clear	Internal	No	4	One End
VO-T8-DW-277F4-E	16	110-277	1863	113	5000	> 80	Frosted	Internal	No	4	One End
VO-T8-NW277F4-E	16	110-277	1754	108	4000	> 80	Frosted	Internal	No	4	One End



E335470 (Type B)

LED T8 Fixtures

All fixtures work with VaOpto Quick Fit or Traditional LED T8 tubes

Recessed LED T8 Fixtures



Model Number	Size	Construction	Power Input	Tube QTY	Diffuser
VO-TF-14-2	1'x4'	24ga Flush steel white	110 - 480 V AC	2	Pattern #12 acrylic Lens. 0.125" thick
VO-TF-22-3	2'x2'	24ga Flush steel white	110 - 480 V AC	3	Pattern #12 acrylic Lens. 0.125" thick
VO-TF-24-3	2'x4'	24ga Flush steel white	110 - 480 V AC	3	Pattern #12 acrylic Lens. 0.125" thick



Model Number	Size	Construction	Power Input	Tube QTY	Diffuser
VO-TF-14L12-2	1'x4'	24ga Flush steel white	110 - 480 V AC	2	Semi-spectacular (matt) - standard
VO-TF-22L9-3	2'x2'	24ga Flush steel white	110 - 480 V AC	3	Semi-spectacular (matt) - standard
VO-TF-24L18-3	2'x4'	24ga Flush steel white	110 - 480 V AC	3	Semi-spectacular (matt) - standard



Model Number	Size	Construction	Power Input	Tube QTY	Diffuser
VO-TF-14SM-2	1'x4'	24ga Flush steel white	110 - 480 V AC	2	Pattern #12 acrylic Lens. 0.125" thick
VO-TF-22SM-3	2'x2'	24ga Flush steel white	110 - 480 V AC	3	Pattern #12 acrylic Lens. 0.125" thick
VO-TF-24SM-3	2'x4'	24ga Flush steel white	110 - 480 V AC	3	Pattern #12 acrylic Lens. 0.125" thick



Strip LED T8 Fixtures



Model Number	Size	Construction	Power Input	Tube QTY	Lamp Shield
VO-TF-4S-1	4'	Housing plate thickness 0.8MM	110 - 480 V AC	1	None
VO-TF-4S-2	4'	Housing plate thickness 0.8MM	110 - 480 V AC	2	None
VO-TF-4S-3	4'	Housing plate thickness 0.8MM	110 - 480 V AC	3	None
VO-TF-4S-4	4'	Housing plate thickness 0.8MM	110 - 480 V AC	4	None
VO-TF-4S-5	4'	Housing plate thickness 0.8MM	110 - 480 V AC	5	None
VO-TF-4S-6	4'	Housing plate thickness 0.8MM	110 - 480 V AC	6	None



LED T8 Fixtures

VaOpto


LED Manufacturer

All fixtures work with VaOpto Quick Fit or Traditional LED T8 tubes

Decorative LED T8 Fixtures



Model Number	Size	Construction	Power Input	Tube QTY	Lamp Shield
VO-TF-14L-1	1'x4'	24ga Flush steel white	110 - 480 V AC	1	Perforated mesh white
VO-TF-22L1-3	2'x2'	24ga Flush steel white	110 - 480 V AC	3	Perforated mesh white
VO-TF-22L2-2	2'x2'	24ga Flush steel white	110 - 480 V AC	2	Perforated mesh/baffle white
VO-TF-24L1-3	2'x4'	24ga Flush steel white	110 - 480 V AC	3	Perforated mesh/baffle white
VO-TF-24L2-2	2'x4'	24ga Flush steel white	110 - 480 V AC	2	Perforated mesh/baffle white

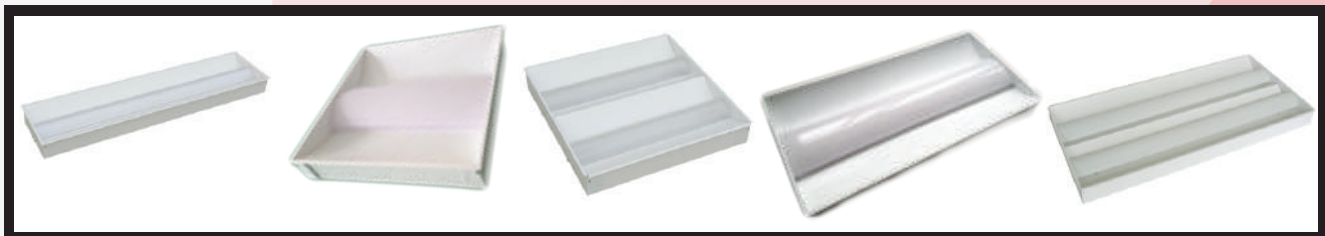

Outdoor LED T8 Fixtures



Model Number	Size	Construction	Power Input	Tube QTY
VO-TF-04W2-1	4"x2'	Polycarbonate	110 - 480 V AC	1
VO-TF-04W2-1	4"x4'	Polycarbonate	110 - 480 V AC	1
VO-TF-04W5-1	4"x5'	Polycarbonate	110 - 480 V AC	1
VO-TF-07W2-2	7"x2'	Polycarbonate	110 - 480 V AC	2
VO-TF-07W4-2	7"x4'	Polycarbonate	110 - 480 V AC	2
VO-TF-07W5-2	7"x5'	Polycarbonate	110 - 480 V AC	2
VO-TF-10W4-3	10"x4'	Polycarbonate	110 - 480 V AC	3
VO-TF-17W4-4	17"x4'	Polycarbonate	110 - 480 V AC	4
VO-TF-07W8-4	7"x8'	Polycarbonate	110 - 480 V AC	4



5178 West Patrick Lane, Las Vegas, NV 89118

Ph: (702) 517-5789 info@vaopto.com

www.vaopto.com