VaOpto
LED Manufacturer

VAOPTO LED HIGH BAY

Installation Manual

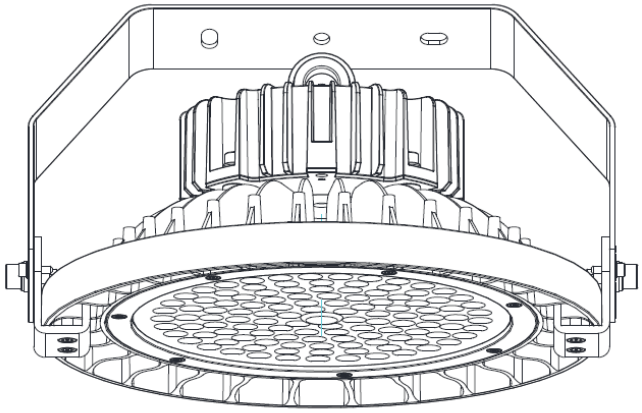

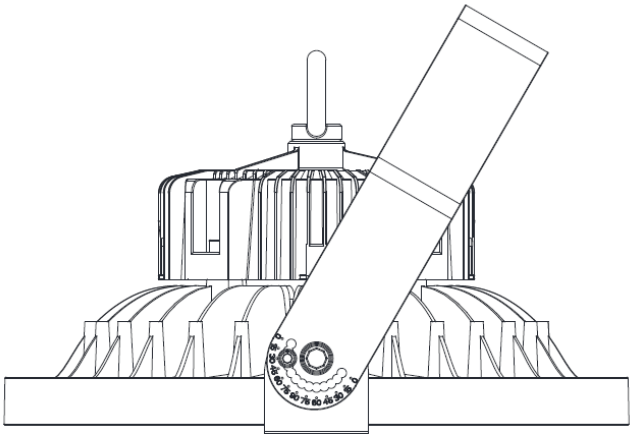

VAOPTO
5178 West Patrick Lane
Las Vegas, NV 89118, USA
P: 702-517-5789
info@vaopto.com
www.vaopto.com

Packing list

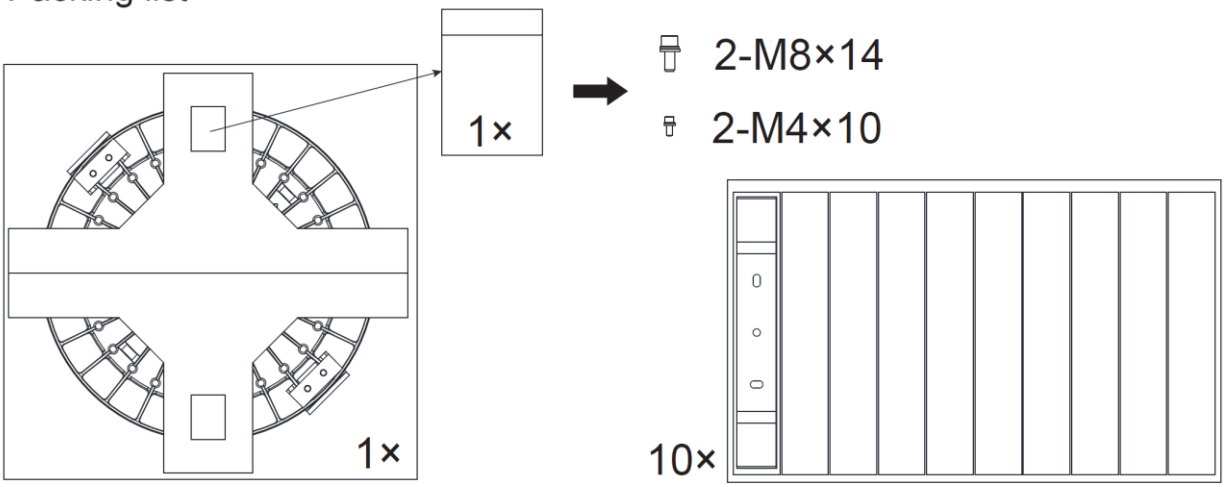

Parameter

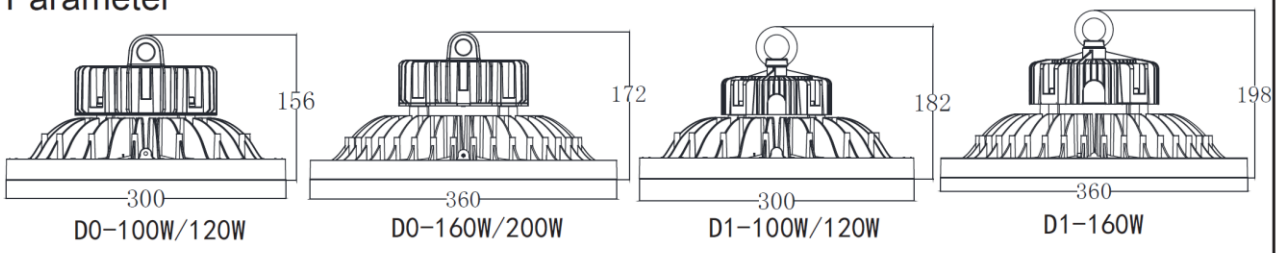

DRIVER	W	L× W× H	NW	GW	ta (℃)
D0	100W	300×300×156	3.90kg	4.8kg	45
	120W				45
	160W	360×360×172	5.40kg	6.8kg	45
	200W				25
D1	100W	300×300×182	3.50kg	4.4kg	45
	120W		3.85kg	4.75kg	45
	160W	360×360×198	5.70kg	7.1kg	45
	200W	360×360×207	6.30kg	7.7kg	25
	240W				25



Wiring diagram

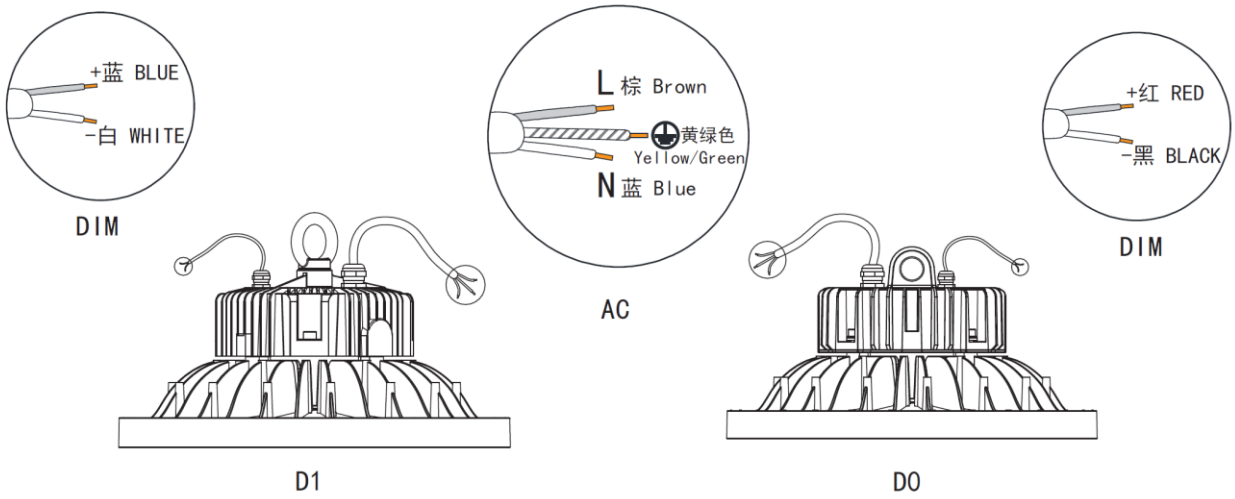

Surface Mount 360°

Options



2-M8×70

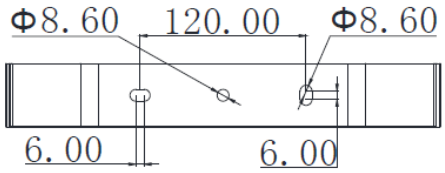

100W/120W/160W/200W/240W Bracket

1

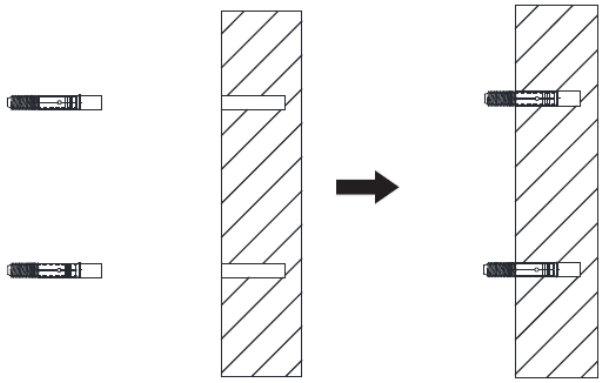

2

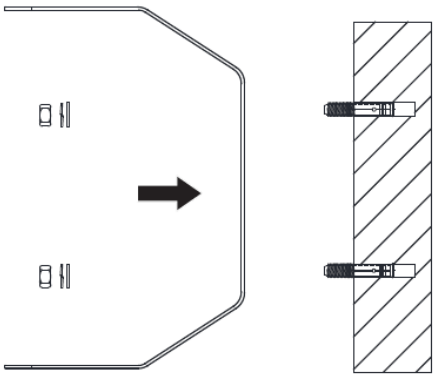

3

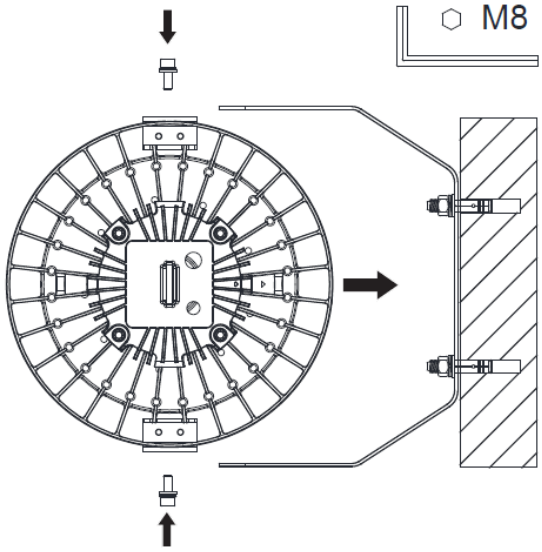

4

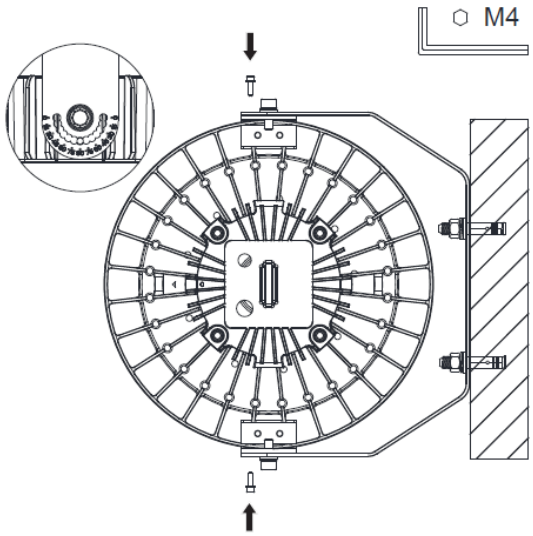

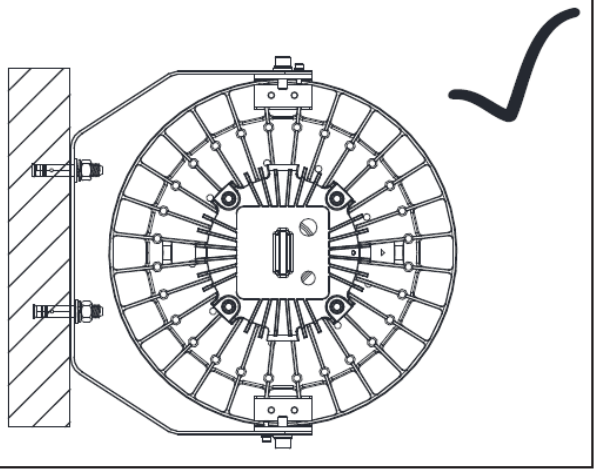

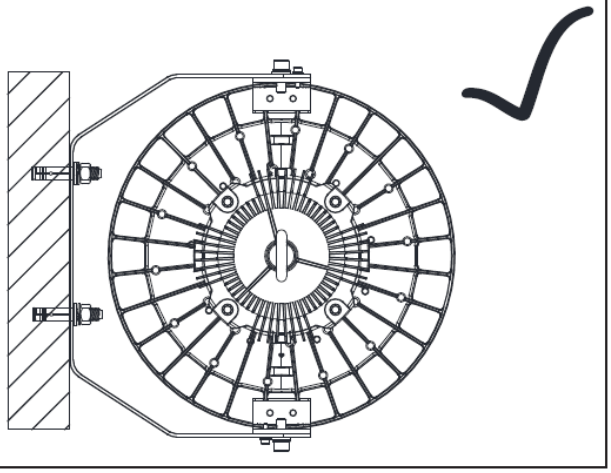

On the basis of the existing fixed way, if you need additional reinforcement, please install the safety rope;

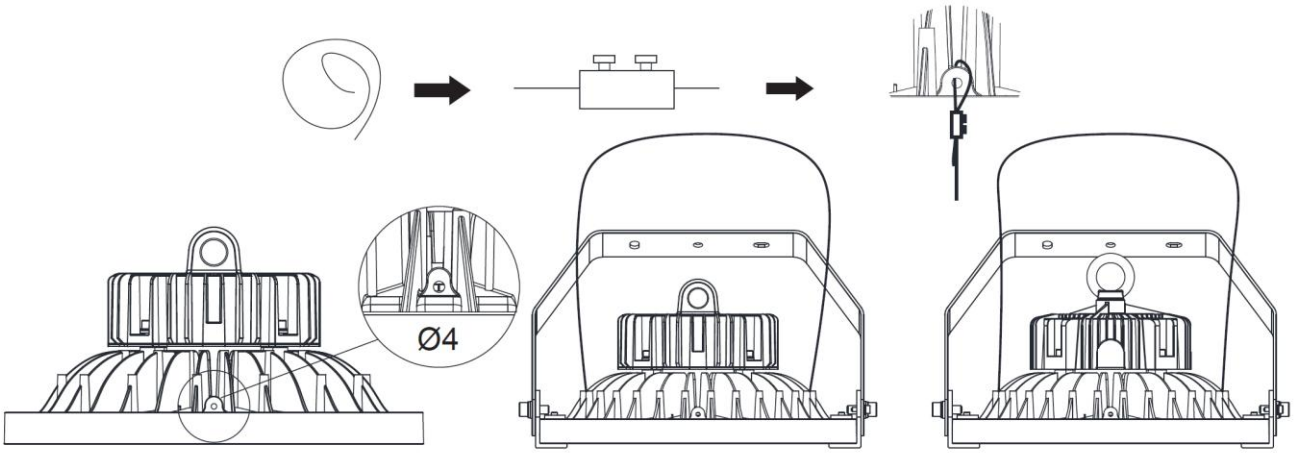

Options

1-safety rope

Reference: 7 * 7 304 stainless steel wire rope, diameter of 2.0 mm, cut length is 1000 mm;

2-The screw locking wire

Reference: FM - Z001-2 of 2 mm wire, 17 * 8.7 * 6.5 mm diameter 4.6 mm nickel plated copper ontology, with galvanized screw a word;

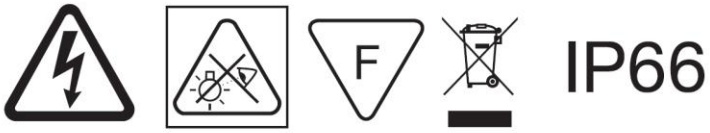

- Read through this manual before installation.
- Handle the product with care.
- The product must be grounded.
- This product must be installed and maintained by certified electrician.
- Consult with the manufacturer before maintenance.
- Turn OFF the power before installation and maintenance.
- Make sure the products are securely installed.
- The housing might become hot after operation.
- Make sure the construction is strong enough to support the products.
- The product will automatically shut down once the temperature goes too high; and will automaticallyturn on once it cools down.
- The external flexible cable or cord of this luminaire cannot be replaced; if the cord is damaged, the luminaire shall be destroyed.